

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 826.1632/JDH

First Named Inventor or Application Identifier:

Akira JINZAKI

Express Mail Label No.

PTO
U.S.
JCS41
09/675060



APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: **Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 46]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 11]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed) (Japanese Appln. 11-303543, filed October 26, 1999).
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

[] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No: /

18. CORRESPONDENCE ADDRESS



21171

PATENT TRADEMARK OFFICE

Staas & Halsey

NEW APPLICATION FEE TRANSMITTAL

Attorney Docket No. 826.1632/JDH
Application Number To be assigned
Filing Date September 29, 2000

AMOUNT ENCLOSED \$886.00

First Named Inventor Akira JINZAKI

FEE CALCULATION (fees effective 12/29/99)

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS	19 - 20 =	0	X \$ 18.00 =	\$ 0.00
	INDEPENDENT CLAIMS	5 - 3 =	2	X \$ 78.00 =	156.00
	MULTIPLE DEPENDENT CLAIMS (any number; if applicable)			+ \$260.00 =	
	BASIC FILING FEE				690.00
	Total of above Calculations =				\$ 846.00
	Surcharge for late filing fee, Statement or Power of Attorney (\$130.00)				+
	Reduction by 50% for filing by small entity (37 CFR 1.9, 1.27 & 1.28).				-
	TOTAL FILING FEE =				\$ 846.00
	Surcharge for filing non-English language application (\$130.00; 37 CFR 1.52(d))				+
	Recordation of Assignment (\$40.00; 37 CFR 1.21(h)(1))				40.00
	TOTAL FEES DUE =				\$ 886.00

METHOD OF PAYMENT

- ☒ Check enclosed as payment.
☐ Charge "TOTAL FEES DUE" to the Deposit Account No., below.
☐ No payment is enclosed and no charges to the Deposit Account are authorized at this time.

GENERAL AUTHORIZATION

- ☒ If the above-noted "AMOUNT ENCLOSED" is not correct, the Commissioner is hereby authorized to credit any overpayment or charge any additional fees necessary to:

Deposit Account No.


19-3935

Deposit Account Name

STAAS & HALSEY LLP

- ☒ The Commissioner is also authorized to credit any overpayments or charge any additional fees required under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (processing fees) during the prosecution of this application, including any related application(s) claiming benefit hereof pursuant to 35 USC § 120 (e.g., continuations/divisionals/CIPs under 37 CFR 1.53(b) and/or continuations/divisionals/CPAs under 37 CFR 1.53(d)) to maintain pendency hereof or of any such related application.

SUBMITTED BY: STAAS & HALSEY LLP

Typed Name	James D. Halsey, Jr.	Reg. No.	22,729
Signature		Date	September 29, 2000

APPLICATION FOR
UNITED STATES LETTERS PATENT
SPECIFICATION

INVENTOR(s): Akira JINZAKI

Title of the Invention: NETWORK SYSTEM HAVING FUNCTION OF
RETRIEVING INFORMATION, NETWORK
TERMINAL DEVICE HAVING FUNCTION OF
RETRIEVING INFORMATION, AND NETWORK
RELAY DEVICE HAVING FUNCTION OF
RETRIEVING INFORMATION

NETWORK SYSTEM HAVING FUNCTION OF RETRIEVING
INFORMATION, NETWORK TERMINAL DEVICE HAVING
FUNCTION OF RETRIEVING INFORMATION, AND NETWORK
RELAY DEVICE HAVING FUNCTION OF RETRIEVING
5 INFORMATION

Background of the Invention

Field of the Invention

The present invention relates to a technology
10 of locating information and a technology of
obtaining information in a service, in which various
information is obtained through a network,
represented by the World Wide Web (WWW) service of
the Internet.

15

Description of the Related Art

The conventional communications technology
provides a system of establishing communications
by specifying a subject (a person, a communications
20 device, a computer, etc.). Therefore, a user
performs the following processes through a network
as shown in FIG. 1 to obtain necessary information.

* checking (retrieving) necessary
information in the network; and
25 * obtaining (transferring) the

information from a computer storing the information through a relay device in the network

In the above mentioned method, the quality of a retrieval result (quality of obtained information, accessibility through a network, etc.) largely depends on the ability of a user. Therefore, for example, necessary information may be inefficiently transferred from a remote place without knowing that it is also located close to a user in a network (that is, stored in a place accessible in transfer or at a high speed). Such inefficiency brings not only a disadvantage to a user but also heavy load to the network and the computer, thereby bringing disadvantages to the entire system.

As a conventional technology developed to solve the above mentioned problem, a retrieval service (a search engine, for example, 'YAHOO as a service of the Internet') is used in a retrieving process, and an agent service (a proxy service) is used in a transferring process.

A retrieval service relates to a database system, and retrieves an address in a network of computers containing information related to a keyword assigned by a user, and returns the result.

The user determines a computer having necessary information based on a plurality of retrieval results, and requests the computer to transfer the information.

5 An agent service is also referred to as a cache service. That is, the information previously transferred by a user is cached for a predetermined period, and the cached information can be transferred without issuing a request to the
10 destination computer when the second and subsequent requests to transfer the information are issued. If the user can be provided with an agent service in the neighborhood in the network, the above mentioned inefficiency of transferring the
15 information from a remote computer in the network can be avoided.

 However, in the conventional technology described above, a retrieval and a transfer are performed independently of each other, there is an
20 inefficiency which can not be avoided.

 For example, although a database of the retrieval service is updated frequently, a computer containing network addresses obtained through the retrieval results may store no information at all,
25 or a computer containing the network addresses may

stop or be removed. In these cases, communications are not established. Normally, the configuration and the position of a computer in a network system can be changed. Unless the retrieval service
5 reflects such a change at a practically high speed, a user cannot obtain the information, unnecessary cost arises in transferring information, wasteful traffic is used in the network, and other problems of inefficiency occur.

10 Even when there are no problems with the update of information, an inefficient process may arise.

For example, assume that results X1 and X2 are obtained by retrieving information X. When an X1 is a remote computer in the network, and an X2
15 is a computer closer than the X1, the user will select the X2. However, the nearest agent server may store the information about the X1. In this case, it is more efficient to select and transfer the X1.

Thus, it is very difficult to centrally manage
20 the retrieval service including the location the replicas of information in the network.

In summary, the conventional technology has the problem that inefficiency occurs by the difference between a retrieval result and an actual
25 state because a retrieval mechanism is independent

of a transfer mechanism.

Summary of the Invention

The present invention aims at realizing an
5 information transfer mechanism having (all or a part
of) an incorporated retrieval mechanism.

The present invention is based on a network
system which communicates with a network device
storing information or other objects.

10 An information network address unit (user
mechanism) assigns an information network address,
which is a network address, to the name of
information or an object.

An information retrieval communications unit
15 (communications mechanism and relay mechanism)
establishes communications using an information
network address for a corresponding network device
storing information or an object.

With the above mentioned configuration
20 according to the present invention, the information
network address unit can be designed to include an
information network address generation unit
(information network address mechanism) for
receiving information representing the feature of
25 information or an object, and outputting an

information network address. The information network address generation unit includes, for example, an operations unit (operations mechanism) for generating an information network address by
5 operations. Furthermore, the operations unit performs operations on an error detection and correction code such as a CRC, etc. Otherwise, the operations unit performs operations on a secure hash function such as an MD5, etc. The above mentioned
10 information network address generation unit includes a database accumulating correspondence between information or an object and an information network address, and generates an information network address by searching the database.
15 Furthermore, the database is, for example, a server of a domain system in which a record type indicating the name of information or an object is added. The information network address generation unit inquires the server of an information network
20 address corresponding to the name of the information or the object. The database can also be a plurality of WEB search engine system, and the information network address generation unit inquires the retrieval system of uniform resource locator
25 information to generate an information network

address.

In addition, the information network address unit can also be designed to include an adjustment unit (adjustment mechanism) for adjusting the length and the representation of a result obtained by inputting the information indicating the feature of information or an object such that the result can be assigned to a part or all of the existing network address as an information network address.

Furthermore, a unit which forms the information retrieval communications unit and relays a packet addressed to the destination specified by an information network address may include an information network address identification unit for identifying an information network address and an information route management unit for managing an information route traced using an information network address. The relay unit can be designed to relay a packet through an information route. The information route management unit manages an information route according to the information set in a packet transmitted from an information network address used in the previous relaying process.

The above mentioned information retrieval

communications unit can be designed to establish communications using an information network address through an existing communications mechanism for a network address already existing as an information
5 network address.

Furthermore, the above mentioned information retrieval communications unit can be designed to assign an information network address to an existing anycast address, multicast address, or broadcast
10 address.

Brief Description of the Drawings

The features and advantages of the present invention will be more clearly appreciated from the following description taken in conjunction with the
15 accompanying drawings in which like elements are denoted by like reference numerals and in which:

FIG. 1 shows the process of retrieving and transferring information in the conventional
20 technology;

FIG. 2 shows the entire configuration of the system according to an embodiment of the present invention;

FIG. 3 shows the configuration of a user
25 mechanism;

FIG. 4 shows the configuration of an information network address;

FIG. 5 shows the configuration of a relay mechanism (routing mechanism);

5 FIG. 6 shows the configuration of an IPv4 header;

FIG. 7 shows the assignment of an IPv4 address;

FIG. 8 shows an example of the configuration of a route table using network addresses;

10 FIG. 9 shows an example of the configuration of the route table using information network addresses;

FIG. 10 shows an operation of updating a route table using information network addresses; and

15 FIG. 11 shows a packet process of a relay mechanism.

Description of the Preferred Embodiments

Embodiments of the present invention are
20 described below in detail by referring to the attached drawings.

Normally, a network address is information for communications (for example, a transmission of a packet) through a network, and is used when a relay
25 mechanism in the network, which transmits

information between a communications device and another communications device, determines the transfer destination of a packet.

Therefore, a network address indicates the position and the identification name of a communications device in a network. For example, a MAC (media access control) address used in Ethernet is an identification name uniquely identifying the network interface in Ethernet. An IP (Internet protocol) address used in Internet is an identification name uniquely identifying the host connected to Internet. Internet has a mechanism for transferring an IP packet according to the unique identification name, and the mechanism performs communications between hosts. A host refers to a device connected to a network, and functions as an end point of communications. Normally, it is a computer. On the other hand, a router mechanism and a relay mechanism do not function as end points themselves, but are fundamentally used to relay a communications packet between hosts. A network device refers to a communications device comprising a host, a router mechanism, and a relay mechanism.

According to the present invention, to incorporate (all or a part of) a retrieval mechanism

into a relay mechanism, an information network address is installed as a new type of network address.

5 An information network address is an identification name of information and an object, and is different from the conventional network address.

10 * First, an information network address is an identification name of specific information or object, and does not uniquely specify a host.

15 * Next, an information network address specifies a host holding the information or object. If one host holds plural pieces of information, the host has a plurality of information network addresses. If a plurality of hosts have the same information, the hosts have the same information network addresses.

20 If the above mentioned information network address is assumed, a transfer mechanism containing (all or a part of) a retrieval mechanism can be realized.

25 As described above, inevitable inefficiency arises in the conventional technology because a retrieving process is performed independent of a transferring process. This problem can be solved

as described below by installing the information network address.

First, a retrieval service for checking the correspondence between information and a network address is not required. Therefore, a user is free from an operation of obtaining a network address through the retrieval service. Since an information network address specifies the host containing corresponding information, a host accessed by a user using an information network address necessarily contains information. If communications cannot be established using an information network address, it means that the information exists nowhere in the network. When the configuration or the position of a host is changed, the change information can be transmitted as route information to a routing mechanism. Therefore, the user can access the optimum host (nearest host or less expensive host in cost) in the network. In addition, if a destination host becomes down during the transfer of information, or if the network becomes faulty, the information can be transferred with the faulty host replaced with another host accessible and containing the same information. Since the flow of information can be

grasped and the latest information can be constantly located (the destination of a packet addressed to the information network address) by monitoring the information network address of a packet transferred through a network, the user can transfer the information from the optimum host with little attention.

FIGS. 2 through 5 show the configuration of the system for realizing the above mentioned functions according to an embodiment of the present invention.

First, FIG. 2 shows the configuration of the entire system according to an embodiment of the present invention.

A network 101 comprises a user mechanism 102, a host 104 containing information, a relay mechanism 103, etc.

The user mechanism 102 converts a character string, an image, voice, and other numeric data having an optional length representing 'information' input as a communications target into a uniquely corresponding information network address, and transmits a packet storing the information network address to the network 101.

Upon receipt of the packet from the user

mechanism 102, the relay mechanism 103 in the network 101 determines the route to the host 104 containing the information corresponding to the information network address stored in the packet, and relays
5 the packet.

Upon receipt of the packet from the relay mechanism 103, the host 104 stores the information corresponding to the information network address stored in the packet in a return packet having a
10 network address corresponding to the user mechanism 102 as a destination address, and transmits it to the network 101.

Upon receipt of the return packet from the host 104, the relay mechanism 103 determines the
15 route to the user mechanism 102 corresponding to the network address stored in the return packet, and relays the return packet.

Upon receipt of the return packet from the relay mechanism 103, the user mechanism 102 receives
20 the information stored in the return packet.

FIG. 3 shows the configuration of the user mechanism 102 shown in FIG. 2.

A information network address mechanism 201 converts a character string, an image, voice, and
25 other numeric data having an optional length

representing 'information' input as a communications target into a uniquely corresponding information network address.

A communications mechanism 202 generates a packet storing the above mentioned information network address and other communications information, transmits it to the network 101, or receives a packet from the network 101 and extracts information from the packet.

FIG. 4 shows the configuration of the information network address mechanism 201 shown in FIG. 3.

An operations mechanism 301 computes a unique value for determination of an information network address from a character string, an image, voice, and other numeric data having an optional length representing 'information' input as a communications target.

An adjustment mechanism 302 adjusts the length and expression of the computation result output from the operations mechanism 301 such that it can be allotted to a part or all of an existing network address.

An information network address generation mechanism 303 generates an information network

address based on the computation result adjusted by the adjustment mechanism 302, and outputs it to the communications mechanism 202 shown in FIG. 2.

FIG. 5 shows the configuration of the relay
5 mechanism (routing mechanism) 103 shown in FIG. 2.

A communications mechanism 401 receives a packet from the network 101 shown in FIG. 2.

An information address detection mechanism
402 detects a network address and an information
10 network address from a received packet.

A transfer instruction mechanism 405
transfers a packet received by the communications
mechanism 401 to a communications mechanism 406
corresponding to an appropriate route by referring
15 to a route table 403 using a network address
according to the network address detected by the
information address detection mechanism 402, and
by referring to a route table 404 using an
information network address according to the
20 information network address detected by the
information address detection mechanism 402.

The communications mechanism 406 transmits
again a packet transferred from the communications
mechanism 401 to the network 101 shown in FIG. 2.

25 Described below is the details of an embodiment

according to the present invention with the above mentioned configuration.

First described is the details of an information network address.

5 First, a 'network address' refers to an address used in a network layer (OSI layer 3). A typical example of this type of address can be an IP address in an Internet protocol. Although it is not a common technical term, an 'information address' is used
10 in Japanese corresponding to the URL (uniform resource locator (refer to RFC1738)). Since the present invention suggests an 'address indicating information' as an address (network address) of a network layer, an 'information network address' is
15 used to clarify the difference from the 'information address'.

An information network address can be realized by assigning a portion used as the information network address to a part of an existing network
20 address. In an IPv4 (Internet protocol version 4 (refer to RFC0791)), an address is represented by 32 bits. If 24 bits in the 32 bits are assigned to an information network address, it can be used as an information network address of the information
25 of 2²⁴ (about 16 million) types. In the IPv6

(Internet protocol version 6 (refer to RFC2460)),
 an address is represented by 128 bits. Assuming
 that a half of the bits are used for an information
 network address, 264 (4 billion multiplied by 4
 5 billion), that is, infinite information network
 addresses can be provided. It is obvious that an
 address system independent of a network address can
 be defined. In this case, however, the relay
 mechanism 103 in the network 101 has to refer to
 10 an information network address as well as a network
 address.

FIG. 6 shows the configuration of data of an
 IPv4 header.

A data field relating to the present invention
 15 can be, for example, a SOURCE IP ADDRESS field, a
 DESTINATION IP ADDRESS field, and an IP OPTIONS field.
 The SOURCE IP ADDRESS field is a source address of
 a packet having the header. The DESTINATION IP
 ADDRESS field is a destination address of a packet
 20 having the header. The IP OPTIONS field is an area
 for realizing an option function defined
 separately.

The address of an IPv4 is 32 bits in length,
 and is prescribed as shown in FIG. 7.

25 For example, the address space of class E is

reserved for future use. However, if the space is used as an information network address, it can be used as an address of 27 bits. A private address is a local address available only in a related
 5 organization, but can be used as an information network address because the use is up to the organization.

Therefore, the system of assigning an information network address can be:

- 10 * re-assigning a network address of the IPv4 as an information network address;
- * assigning a reserved area;
- * newly defining and assigning an area as an information network address;
- 15 * assigning a network address of the IPv4 to a private address; etc.

It is necessary to assign an address other than a private address with an international agreement. That is, an address cannot be personally
 20 assigned. On the other hand, a private address is valid only in an independent organization. Therefore, when an information network address is used in a private organization, it can be freely assigned without international permission.
 25 Whether or not an international permission is

required is a problem independent of the technology of the present invention, and is not discussed here. However, it is apparent in technique that a part of an existing network address can be assigned for
5 an information network address. In addition, it is possible to assign an information network address in the similar method using other network addresses, for example, in an IPv6, etc.

An information network address can also be
10 defined using an IP OPTIONS field. An IP OPTIONS field is not a field for a network address, but stores information to be referred to when the relay mechanism 103 (FIG. 2) such as a router, etc. relays a packet. To use an information network address
15 in an IP OPTIONS field, its format is to be defined and an international agreement is required.

Since an IP address field is fixed in length while an IP OPTIONS field can be a longer area, a long address and a variable length address can be
20 used as an information network address. However, in consideration of the process speed described later, data can be transmitted with a short fixed-length at a higher speed.

Next, the above mentioned information network
25 address mechanism 201 (shown in FIG. 3) in the user

mechanism 102 converts a character string, an image, voice, and other numeric data having an optional length representing 'information' input as a communications target into a uniquely corresponding information network address.

There are a large number of means for realizing the mechanism. It is expected that different pieces of information are assigned different information network addresses. However, this is not an absolute requirement, and several pieces of information which may be different at a certain probability can have the same information network addresses.

For example, an ISBN (international standard book number) assigned to a book is an identification number assigned to a book under management of a publisher. By assigning the number as is to an information network address, an information network address of a book can be obtained. However, since the management of numbers are left to a publisher, the same numbers can be assigned to others. Therefore, the number can be used double. However, from the viewpoint of searching for information, the numbering is effective enough.

Thus, there are other information network addresses assigned in a certain method, but an

information network address having a given length can also be computed from optional information otherwise featuring information. The operations mechanism 301 shown in FIG. 4 provides the function.

5 For example, the operations mechanism 301 computes an error detection code in the CRC (cyclic redundancy check) system, etc. from data indicating given information. Normally, an error detection code in the CRC system, etc. is used to detect whether
10 or not an error such as an irregular bit, etc. has occurred during the transmission of data. Based on that a different error detection code is assigned to each piece of data, an error detection code can be used to compute a short numeric string as an
15 information network address from information of any length featuring information.

Otherwise, the operations mechanism 301 computes an information network address using a secure hash function from data indicating given
20 information. For example, an MD 5 algorithm (message digest 5 (refer to RFC1321)) obtains an operation result of 128 bits by performing predetermined computation on original text of any length. This algorithm defines a computing method
25 such that there is a very small possibility that

the same value can be obtained from different pieces of original text. This indicates that if original text (information having any length and featuring information) is different, a different value can
5 be obtained, and a different value can be used as a substantially unique information network address. The algorithm is a method of computing an information network address having a higher level in uniqueness than an error detection code.

10 To use an operation result from the operations mechanism 301 as an information network address, it may be necessary to reconvert the value of an operation result into an information network address. For example, an operation result obtained
15 by the MD 5 algorithm is used in an information network address of 24 bits defined by the IPv4, the conversion from 128 bits to 24 bits is required. The adjustment mechanism 302 shown in FIG. 4 is a mechanism for performing the conversion, and is
20 indispensable to obtain an information network address from existing information and operation system. The adjustment mechanism 302 can be realized by mechanically extracting a part of numeral data and performing again a coding process
25 in the CRC system, etc.

FIG. 4 shows an example of the configuration in which the information network address mechanism 201 shown in FIG. 3 is realized as a mechanism for computing an information network address in an operation. On the other hand, it is also possible to design the information network address mechanism 201 such that a database accumulating correspondence between information and an information network address can be provided, in which an information network address is not obtained in an operation, but an information network address of the information can be obtained by searching the database.

Practically, the information network address mechanism 201 can be designed to obtain an information network address using a domain name system (DNS (refer to RFC1591)) widely used through Internet as a network address database. In the DNS, the address information of a network device can be defined and referred to according to a plurality of attributes. For example, an A record refers to an IPv4 address, an AAAA record refers to an IPv6 address. The network device can have both IPv4 and IPv6 addresses, and necessary address information can be obtained when a record is specified for

reference. Then, as the information network address mechanism 201, a record type indicating the name of information or an object is added to the DNS server, and the DNS server is inquired. Thus,
5 an information network address corresponding to the name of information or an object can be obtained.

Otherwise, the information network address mechanism 201 can also be designed to utilize the WWW (world wide web) retrieval engine to obtain an
10 URL (uniform resource locator (uniform resource locator (refer to RFC1738))), and generate an information network address from the URL.

The 'Information Address Converting method, Information Address Conversion Apparatus, and
15 Information Retrieval System' described in the Japanese Patent Publication No.9-3219633 (hereinafter referred to as a reference) is known as a similar technology. The difference between the reference and the present invention is described
20 below.

The reference has the following features.

- * An information address such as an URL address, etc. comprising a character, a value, and a symbol string is converted into a short numeric string.
- 25 * A compressed code system (Huffman code,

arithmetic operation code) is used as a conversion system.

* Information can be easily retrieved by a simple apparatus and operation by specifying an
5 information address using a short numeric string.

The present invention suggests a system of obtaining a 'network address' from a character string indicating information, and is different in purpose and condition from the reference in which
10 any format of 'numeric code' is obtained to 'easily retrieve information'.

First, the present invention aims at newly installing an 'information network address' to be used as a 'network address', and simultaneously
15 performing a retrieving and transferring processes while the reference simply aims at retrieving information.

Relating to deriving a 'short numeric string' from a 'symbol string indicating information', the
20 reference and the operations mechanism 301 and the adjustment mechanism 302 (shown in FIG. 4) of the present invention have fundamentally the same objects. However, according to the present invention, a derived 'short numeric string' is used
25 as a part of a 'network address', which is different

from the reference. Therefore, according to the present invention, the adjustment mechanism 302 for adjusting the derived 'short numeric string' into an existing 'network address' is required.

5 Finally, the present invention is different from the reference in a unit for actually deriving an address. The reference uses the compressed code system only, but the present invention uses not only the operations system, such as an error detecting
10 operation, a secure hush function, etc., quite different from that of the reference, but also a system using a database. Thus, the present invention is quite different from the reference in realization system.

15 When a packet is transferred in a network, a relay mechanism in the network stores a route table, and transfers the packet to an appropriate link according to a result of retrieving a destination network address of a received packet on the route
20 table. A similar route table (route table according to an information network address) is required in transferring a packet having an information network address.

 Then, the relay mechanism 103 (FIG. 2) in the
25 system according to the present embodiment of the

present invention stores the route table 404 using an information network address in addition to the route table 403 using a conventional network address as shown in FIG. 5. The transfer instruction mechanism 405 in the relay mechanism 103 refers to the route table 403 using a network address based on the network address detected by the information address detection mechanism 402, and refers to the route table 404 using an information network address based on the information network address detected by the information address detection mechanism 402, thereby transferring the packet received by the communications mechanism 401 to the communications mechanism 406 corresponding to an appropriate route.

FIG. 8 shows an example of the configuration of the route table 403 using a network address. FIG. 9 shows an example of the configuration of the route table 404 using an information network address.

Various configurations of the route table 404 using an information network address can be listed, but essentially required are the following items.

* Information specifying an 'information route' of an information network address, a group of information network addresses, etc.

- * a relayed-to link address
- * metric value (distance)
- * state information

An 'information route' corresponds to the

5 'route' specified by a network address and the mask
 (shown in FIG. 8) of the network address in the route
 table used by a normal router. The transfer
 instruction mechanism 405 (shown in FIG. 5) in the
 relay mechanism 103 determines whether or not the
 10 destination address of the received packet is a part
 of the address or the address group specified by
 the item. If a matching result is output, the
 transfer instruction mechanism 405 transfers the
 packet to a corresponding 'relayed-to link
 15 address'.

Normally, a plurality of 'information routes'
 can be applied to one information network address.
 In this case, the optimum route can be selected using
 a 'metric value (distance)' as an index. A similar
 20 mechanism is used in a common route table (FIG. 8),
 and the metric value is dynamically adjusted to
 obtain the optimum route. Since route control using
 a metric value is a well-known technology, it is
 not explained in detail here.

25 In an information route, a packet is not

transferred only through the optimum route, but a process of transferring a packet through a route having a relatively high metric value is also required because a retrieving process requires
5 redundancy to a certain extent. Since a process of transferring a packet through a plurality of routes is performed in a common relay process in the broadcast or the multicast, the detailed explanation is omitted here.

10 The control information containing the state of a route, etc. is stored as 'state information'. For example, when a relayed-to link is temporarily faulty, 'faulty' is set in the state information. Thus, the route can be temporarily set unavailable.
15 Since the state information is commonly used as a well-known technology, the explanation is omitted here.

Described below is the operation of the relay mechanism 103 updating the route table 404 using
20 an information network address.

Conventionally, the RIP (routing information protocol (refer to RFC2453)), the BGP (border gateway protocol (refer to RFC1771)) are known as means for updating a route table. These means
25 provide the function of maintaining the contents

of a route table in the latest state in the network by notifying each other of a change in a route between relay mechanisms.

It is inquired whether or not information
5 identified by the URL is stored among the WWW agent server. If it is stored, the information is normally transmitted by an ICP (Internet cache protocol (refer to RFC2186/2187)). When an agent server does not store the information identified
10 by the URL, it requests the final host identified by the URL to transfer the information, or inquire of another agent server whether or not the information identified by the URL is stored. If yes, the agent server is requested to transfer the
15 information.

A similar means can be applied in the management of a route of an information network address.

FIG. 10 shows the operation of updating the
20 route table 404 using an information network address specific to the present invention.

The communications mechanism 401 (shown in FIG. 5) in the relay mechanism 103 checks the information network address of the packet received
25 from the network 101, and has the 'information route'

managed on the route table 404 using an information network address reflect the address according to a predetermined discrimination standard. When the source address information stored in the packet is
5 an information network address, it is assumed that the host 104 (FIG. 1) storing the information identified by the information network address is located in the link area where the packet has arrived. Thus, appropriate adjustments can be automatically
10 made corresponding to a change in network state by updating the 'information route' of the route table 404 using an information network address according to the source address information.

Thus, according to the present invention,
15 assuming that the host 104 which transmits 'information' is located around the area of the source address of a relay packet (in the direction of receiving the relay packet), the route table 404 using an information network address is managed
20 based on a source address, which is the novelty of the present invention.

FIG. 11 shows a packet process performed by the relay mechanism 103.

In FIG. 11, the relay mechanism 103 receives
25 a management packet in addition to a normal relay

packet. A management packet is used for update management of the route table 404 using an information network address, and is communicated between relay mechanisms 103.

5 First, in the packet reception waiting process in step 1, the relay mechanism 103 waits for the receipt of a packet from the network 101. When a relay packet is received, the relay mechanism 103 performs the process in step 2. When a management
10 packet is received, it performs the information routing process in step 3.

In the packet receiving process (when a relay packet is received) in step 2, the relay mechanism 103 checks the destination address. If the address
15 is an information network address, the relay mechanism 103 performs the information route relaying process in step 2-1. If the address is a normal network address, it performs the normal route relaying process in step 2-2.

20 The relay mechanism 103 searches the route table 404 (FIG. 5) using an information network address in the information route relaying process (when the destination address is an information network address), determines the optimum route, and
25 transmits the packet through the determined route

if possible. Then, the relay mechanism 103 performs the information routing process in step 3.

The relay mechanism 103 searches the route table 403 (FIG. 5) using a network address in the information route relaying process in step 2-2 (when the destination address is a normal network address), determines the optimum route, and transmits the packet through the route if possible. Then, the relay mechanism 103 performs the information routing process in step 3.

The relay mechanism 103 checks the type of the received packet in the information routing process in step 3. If the packet is a management packet, the relay mechanism 103 performs the route updating process using the management packet in step 3-1. If the packet is a relay packet, it performs the source address checking process in step 3-2.

The relay mechanism 103 updates the route table 404 using an information network address and the route table 403 using a network address at an instruction of the management packet in the route updating process using a management packet in step 3-1. Then, the relay mechanism 103 enters the packet reception waiting process in step 1.

The relay mechanism 103 checks the source

address of the relay packet in the source address checking process in step 3-2. If the address is an information network address, the relay mechanism 103 performs the information route updating process in step 4. If the address is a normal network address, it returns the packet reception waiting process in step 1.

The relay mechanism 103 updates the route table 404 using an information network address for the information route in the direction of the link through which the relay packet is received in the route updating process in step 4. Then, the relay mechanism 103 returns to the packet reception waiting process in step 1.

In addition to the above mentioned embodiment, the present invention can be designed to establish communications using an information network address without setting an information network address route by using an existing communications mechanism for an existing network address used as an information network address.

Furthermore, the present invention can be designed to use an existing communications mechanism as is by assigning an information network address to a conventional anycast address (refer

to RFC1546). The anycast address is basically similar to the unicast address, but refers to the 'optimum host' in the hosts belonging to a network.

Furthermore, the present invention can be
5 designed to use an existing communications mechanism as is by assigning an information network address to a conventional multicast address (refer to RFC2375, etc. relating to the IPv6). A multicast address is assigned to a plurality of host groups.

10 Otherwise, the present invention can be designed to use an existing communications mechanism as is by assigning an information network address to a conventional broadcast address. A broadcast address is a special variation of a
15 multicast address, and is used for broadcast for all hosts belonging to a specified network.

The present invention can also be designed as a computer readable storage medium for directing a computer to perform the function similar to the
20 function realized by the user mechanism or the relay mechanism according to the above mentioned embodiments of the present invention. In this case, for example, using a portable storage media such as a floppy disk, a CD-ROM disk, an optical disk,
25 a removable hard disk, etc., or through a network

line, a program for realizing each function of the
embodiments of the present invention is loaded onto
the memory (RAM, hard disk, etc.) of the computer
forming part of the user mechanism or the relay
5 mechanism, and is then executed.

According to the present invention, a
retrieval service in which the correspondence
between information and a network address is not
required.

10 When the configuration or the position of a
host is changed, the change information can be
transmitted as route information to a routing
mechanism. Therefore, the user can access the
optimum host (nearest host or less expensive host
15 in cost) in the network. In addition, if a
destination host becomes down during the transfer
of information, or if the network becomes faulty,
the information can be transferred with the faulty
host replaced with another host accessible and
20 containing the same information. Since the flow
of information can be grasped and the latest
information can be constantly located (the transfer
destination of a packet addressed to the information
network address) by monitoring the information
25 network address of a packet transferred through a

What is claimed is:

1. A network system which communicates with a network device storing information or an object,
5 and has a function of retrieving information, comprising:

an information network address unit assigning an information network address which is a network address to a name of the information or the object;
10 and

an information retrieval communications unit establishing communications for the network device storing the information or the object corresponding to the information network address.
15

2. The system according to claim 1, wherein said information network address unit comprises an information network address generation unit inputting information indicating a feature of
20 the information or the object, and outputting the information network address.

3. The system according to claim 2, wherein said information network address unit
25 comprises an operations unit generating the

information network address in arithmetic operation.

4. The system according to claim 3, wherein
5 said operations unit computes an error detection and correction code.

5. The system according to claim 3, wherein
said operations unit computes a secure hash
10 function.

6. The system according to claim 2, wherein
said information network address generation
unit is equipped with a database for accumulating
15 correspondence between the information or the object and the information network address, and generates the information network address by searching the database.

20 7. The system according to claim 6, wherein
said information network address generation unit adds a record type indicating the name of the information or the object to a server of a domain name system which is the database, and obtains an
25 information network address corresponding to the

name of the information or the object.

8. The system according to claim 6, wherein
said information network address generation
5 unit inquires uniform resource locator information
of a plurality of WEB search engine retrieval system
which is the database, and generates the information
network address according to the obtained
information.

10

9. The system according to claim 1, wherein
said information network address unit
comprises an adjustment unit adjusting length and
representation of a result obtained by inputting
15 information indicating a feature of the information
or an object such that the result can be assigned
to a part or all of an existing network address as
the information network address.

20 10. The system according to claim 1, wherein:
a portion for forming part of said information
retrieval communications unit and relaying a packet
addressed to the information network address
comprises:

25 an information network address

identification unit identifying the information network address; and

an information route management unit managing an information route using the information network address, wherein

said relaying portion relays the packet through the information route.

11. The system according to claim 10, wherein said information route management unit manages the information route according to information set in a packet transmitted from a previously relayed information network address.

12. The system according to claim 1, wherein said information retrieval communications unit establishes communications using the information network address by using an existing network address as the information network address and an existing communications mechanism for the network address.

13. The system according to claim 1, wherein said information retrieval communications unit assigns the information network address to an

existing anycast address.

14. The system according to claim 1, wherein
said information retrieval communications
5 unit assigns the information network address to an
existing multicast address.

15. The system according to claim 1, wherein
said information retrieval communications
10 unit assigns the information network address to an
existing broadcast address.

16. A network terminal device which communicates
with a network device storing information or an
15 object, and has a function of retrieving information,
comprising:

an information network address unit assigning
an information network address which is a network
address to a name of the information or the object;
20 and

an information retrieval communications unit
establishing communications for the network device
storing information or an object corresponding to
the information network address.

25

17. A computer-readable storage medium storing a program used for a computer forming a network terminal device for communicating with a network device storing information or an object, said
5 program comprising:

assigning an information network address which is a network address to a name of the information or the object; and

10 establishing communications for the network device storing the information or the object corresponding to the information network address.

18. A network relay device which relays communications established for a network device
15 which stores information or an object using an information network address which is a network address assigned to a name of the information or the object, comprising:

an information network address
20 identification unit identifying the information network address; and

an information route management unit managing an information route using the information network address, wherein

25 said packet is relayed through the information

route.

19. A computer-readable storage medium storing
a program used for a computer forming a network relay
5 device which relays communications established for
a network device which stores information or an
object using an information network address which
is a network address assigned to a name of the
information or the object, said program comprising:
10 identifying the information network address;
managing an information route according to
the information network address; and
relaying the packet through the information
route.

15

Abstract of the Disclosure

An information transfer mechanism including (all or a part of) a retrieval mechanism can be realized. A user mechanism converts numeric data indicating 'information' into a uniquely corresponding information network address, and transmits a packet storing the address to the network. A relay mechanism which has received the packet determines the route to a host storing the information corresponding to the information network address stored in it, and relays the packet. Upon receipt of the returned packet from the host, the relay mechanism determines the route to the user mechanism corresponding to the network address stored in the return packet, and relays the return packet. Upon receipt of the return packet from the relay mechanism, the user mechanism receives the information stored in the return packet.

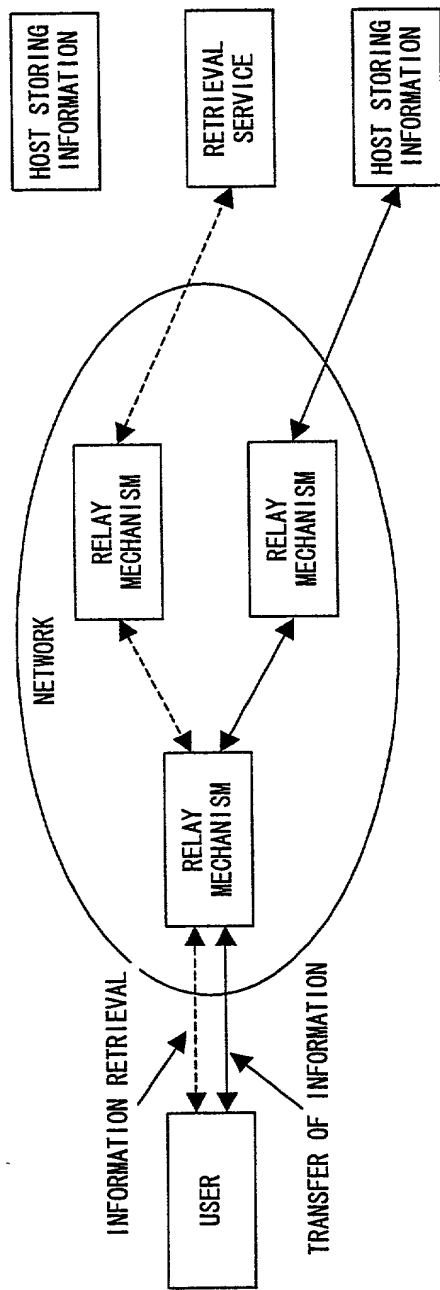


FIG. 1 PRIOR ART

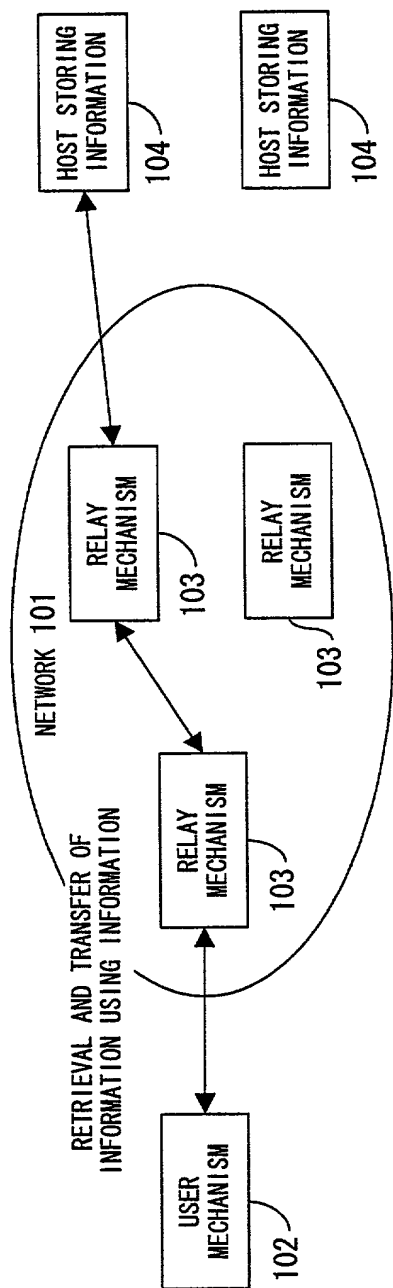


FIG. 2

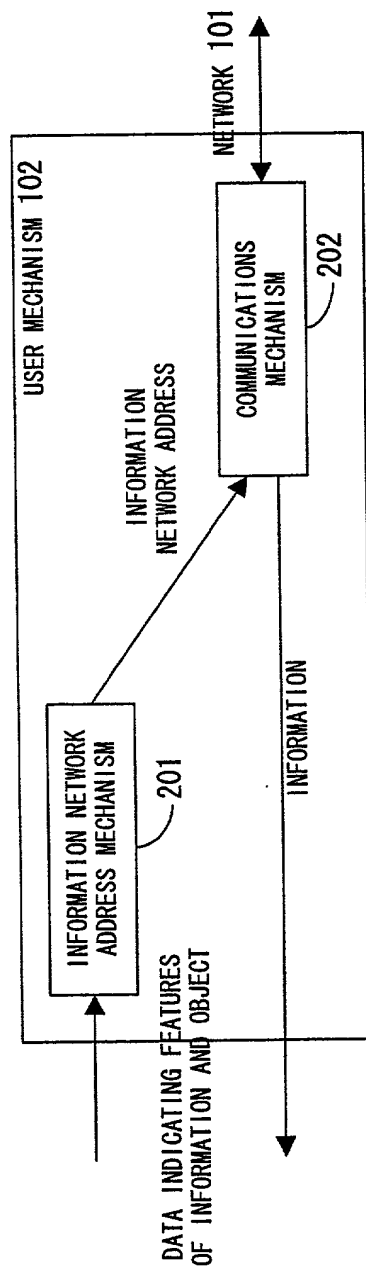


FIG. 3

VERS	HLEN	TOS	TOTAL LENGTH	
IDENTIFICATION			FLAGS	FRAGMENT OFFSET
TIME TO LIVE		PROTOCOL	HEADER CHECKSUM	
SOURCE IP ADDRESS				
DESTINATION IP ADDRESS				
IP OPTIONS & PADDING				

FIG. 6

	0	1	2	3	4		8		16		24		31
A	0	NETWORK ADDRESS				HOST ADDRESS							
B	1	0	NETWORK ADDRESS				HOST ADDRESS						
C	1	1	0	NETWORK ADDRESS					HOST ADDRESS				
D	1	1	1	0	MULTICAST ADDRESS								
E	1	1	1	1	0	ADDRESS RESERVED FOR FUTURE USE							

CLASS	RANGE		
A	0.0.0.0	~	127.255.255.255
B	128.0.0.0	~	191.255.255.255
C	192.0.0.0	~	223.255.255.255
D	224.0.0.0	~	239.255.255.255
E	240.0.0.0	~	247.255.255.255
PRIVATE ADDRESS	10.0.0.0	~	10.255.255.255
	172.0.0.0	~	172.31.255.255
	192.168.0.0	~	192.168.255.255

FIG. 7

NETWORK ADDRESS	MASK	RELAYED-TO LINK ADDRESS	DISTANCE
ADDRESS 1	MASK 1	RELAYED-TO LINK 1	DISTANCE 1
ADDRESS 2	MASK 2	RELAYED-TO LINK 2	DISTANCE 2
ADDRESS 3	MASK 3	RELAYED-TO LINK 3	DISTANCE 3
...

F I G. 8

FIG. 9

INFORMATION NETWORK ADDRESS	RELAYED-TO LINK ADDRESS	DISTANCE
ADDRESS 1	RELAYED-TO LINK 1	DISTANCE 1
ADDRESS 2	RELAYED-TO LINK 2	DISTANCE 2
ADDRESS 3	RELAYED-TO LINK 3	DISTANCE 3
...

STEP	PROCESS NAME	CONTENTS OF PROCESS	STATE TRANSITION
1	PACKET RECEPTION WAITING PROCESS	WAITING FOR RECEPTION OF PACKET	RECEIVING RELAY PACKET → 2
		CHECKING RECEIVED PACKET	RECEIVING MANAGEMENT PACKET → 3
2	PACKET RECEIVING PROCESS	CHECKING DESTINATION ADDRESS	INFORMATION NETWORK ADDRESS → 2-1
2-1	INFORMATION ROUTE RELAYING PROCESS	SEARCHING ROUTE TABLE USING INFORMATION NETWORK ADDRESS	→ 3
		DETERMINING OPTIMUM INFORMATION ROUTE	
2-2	NORMAL ROUTE RELAYING PROCESS	TRANSFER PACKET IF POSSIBLE	→ 3
		SEARCHING ROUTE TABLE USING NETWORK ADDRESS	
3	INFORMATION ROUTING PROCESS	DETERMINING OPTIMUM ROUTE	WHEN MANAGEMENT PACKET IS RECEIVED → 3-1
		TRANSFERRING PACKET IF POSSIBLE	
3-1	ROUTE UPDATING PROCESS USING MANAGEMENT PACKET	CHECKING RECEIVED PACKET	WHEN RELAY PACKET IS RECEIVED → 3-2
		UPDATING ROUTE TABLE USING INFORMATION NETWORK ADDRESS AND ROUTE TABLE USING NETWORK ADDRESS AT INSTRUCTION OF MANAGEMENT PACKET	→ 1
3-2	SOURCE ADDRESS CHECKING PROCESS	CHECKING SOURCE ADDRESS OF RELAY PACKET	INFORMATION NETWORK ADDRESS → 4
		UPDATING ROUTE TABLE USING INFORMATION NETWORK ADDRESS FOR INFORMATION ROUTE IN DIRECTION OF LINK THROUGH WHICH RELAY PACKET IS RECEIVED	NORMAL NETWORK ADDRESS → 1
4	INFORMATION ROUTE UPDATING PROCESS		→ 1

FIG. 11

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and

for which a patent is sought on the invention entitled
NETWORK SYSTEM HAVING FUNCTION OF
RETRIEVING INFORMATION, NETWORK
TERMINAL DEVICE HAVING FUNCTION OF
RETRIEVING INFORMATION, AND NETWORK
RELAY DEVICE HAVING FUNCTION OF
RETRIEVING INFORMATION

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
 （該当する場合） _____ に訂正されました。

☐ was filed on _____
 as United States Application Number or
 PCT International Application Number
 _____ and was amended on
 _____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一ヵ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
11-303543

(Number)
(番号)

Japan

(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は英に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

26th/October/1999

(Day/Month/Year Filed)
(出願年月日)

(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続を米特許審議局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
人氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358;
William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul
I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938;
Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor
Akira JINZAKI	
発明者の署名	Inventor's signature
日付	Date
住所	Residence
国籍	Citizenship
私書箱	Post Office Address
	4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan
第二共同発明者	Full name of second joint inventor, if any
第二共同発明者	Second inventor's signature
日付	Date
住所	Residence
国籍	Citizenship
私書箱	Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)